

CALL FOR PRICE

Quantity Discounts AVAILABLE



PC / PLC Controlled (Optional)

ORDER	QTY.	SHIP DATE
T290	4500	12/09/05
R568	2500	12/19/05
C213	2300	01/12/06
T290	4500	01/30/06
C567	2300	01/12/06
P098	1900	01/23/06
Q345	4000	02/15/06
J625	6500	04/01/06

ORDER	QTY.	SHIP DATE
T290	4500	12/09/05
R568	2500	12/19/05
C213	2300	01/12/06
T290	4500	01/30/06
C567	2300	01/12/06
P098	1900	01/23/06
Q345	4000	02/15/06
J625	6500	04/01/06

THINK SAFETY!

Standard Features

- Hi-efficiency red LEDs
- Static characters displayed from right to left
- Simple ASCII data string w/128 character set
- Multiple baud rate settings
- Multi-drop capability (each unit is addressable)
- aluminum enclosure w/a black powder coat finish
- 6' line cord with business plug

What's in the Box:

- Bright 2.0" LED Message Marquee w/TEN digits Viewable
- Static (Fixed), Alphanumeric Message Display
- Sub-D Connector and Terminal Block to Wire in Date Cables
- Mounting Brackets
- Complete Instructions
- Factory Service 1-Year Warranty on Parts & Labor
- Unlimited Technical Phone Support

ED050-1005-"X" L-N1

Case Size: 26" x 4" x 3.0" Per Line
LED Array: "X" Rows x 20 Columns
Pitch: 0.3"

*Customer-Defined # of Rows

Common Types of Data Displayed

- Production Counts*
- Production Rates*
- Process Variables*
- Flow Rates*
- Cycle Times*
- Serial Numbers*
- Part Numbers*
- Alarm Events*
- Rejects/Reasons*
- Downtime/Reasons*

Design your own custom sign! Tell us the number of lines and/or characters.

Displaying information to employees is key to communicating ideas and goals and making decisions. Our industrial line of scrolling message signs are an excellent way to keep workers in touch with the ever changing industrial environment.

Message marquees can interface with PLC's, PC's and Embedded Controllers. We can provide the ASCII commands that will allow you to add data strings to virtually any software code.

ORDER	QTY.	SHIP DATE
T290	4500	12/09/05
R568	2500	12/19/05
C213	2300	01/12/06
T290	4500	01/30/06
C567	2300	01/12/06
P098	1900	01/23/06
Q345	4000	02/15/06
J625	6500	04/01/06

THINK SAFETY!

2" High, alphanumeric text. Viewable up to 100 feet away.
 ASCII protocol provided. Download your Excel© spreadsheet directly to the display.

Tough, aluminum enclosure and acrylic face.

Easy to control using an RS485 serial input or connect to your network with pur Ethernet adaptor.

Keep your staff up to date with real-time data.



2" High Alphanumeric Text	Static (Fixed) Messages
Serial RS485 / Ethernet Communication	NEMA 1 Aluminum Cabinet Standard (NEMA 12 Optional)
10 Characters Per Customer-Defined Lines	Download Exce© Spreadsheet Information / ASCII Protocol


Electrical Specifications

Power Source	120 Volts AC / 60 Hz.
Power Consumption	Max. 10 Watts Per Line
Current Draw	Typical 600 mA Per Line
Data Interface	RS232 / RS485 / Ethernet / USB Device
Power Cord Length	6 Foot Business Plug



Physical Specifications

Indoor / Outdoor	Designed to be Installed and Viewed Indoors
Operating Environment	32° to 120° F (0°C to 49°C) / 0 - 95% Humidity
Dimensions	26" L x 4.0" H x 2.25" D
Weight	Approx. 15 Lbs.
Number of Digits	Ten (10) Characters Displayed Per Line
Character Height	2.0" High Alpha-Numeric Text
Viewing Distance	80 - 100 Feet Away
LED Color	Red (Standard), Green / Amber (Optional) Call for details
LED Intensity	10 MCD High-Intensity Digits
U.L. Listed Power Supply	Yes
Enclosure Color / Material	Black Extruded Aluminum
Enclosure NEMA Rating	NEMA1 Rated - Standard NEMA12 Rated - Optional
Mounting Method	Two Mounting Brackets Mounting Methods (.pdf)
Limited Warranty	Factory Service One-Year Parts & Labor

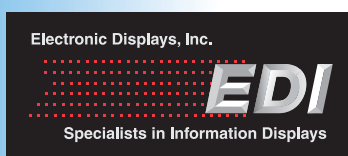

135 S. Church Street • Addison, IL 60101
 Phone: 630-628-0658 • Toll-Free: 800-367-6056 • Fax: 630-628-0936
www.electronicdisplays.com


PROUDLY MADE IN THE U.S.A.

Also available in 1.2' and 4' Characters.

The **ED-XL series** is a single-color message center that is available in red, green or yellow characters to get your message across. Ideal to promote your business, safety messages, employee messages and more.

Customizable in three different character sizes: 1.2" / 2" and 4".



- Number of rows are variable
- Number of characters are variable

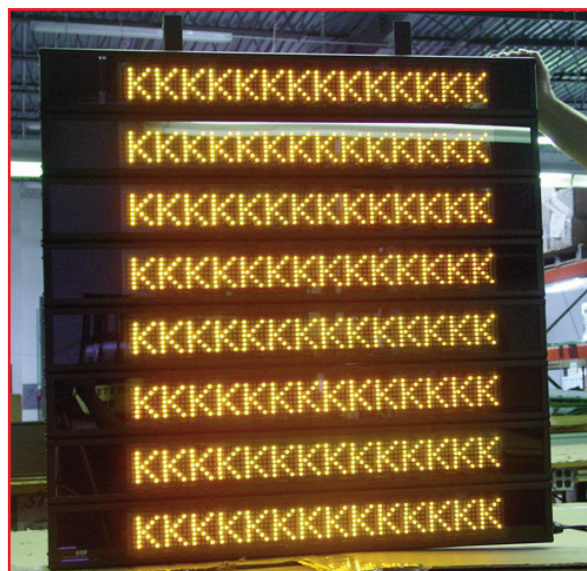

Customization Options

To customize your **ED-XL series** message center use the following as a guideline to determine the model you need.

- XXXX** = Character Height (1.2" / 2" / 4")
- YY** = Number of Characters per Line (in sections of 10)
- Z** = Number of lines

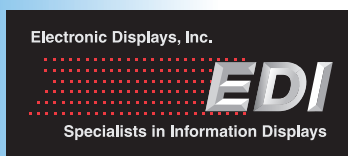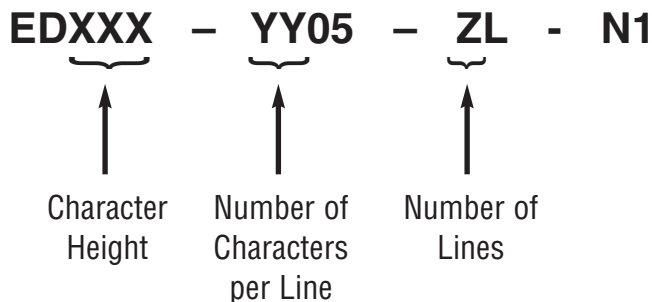

135 S. Church Street • Addison, IL 60101
Phone: 630-628-0658 • Toll-Free: 800-367-6056 • Fax: 630-628-0936
www.electronicdisplays.com

PROUDLY MADE IN THE U.S.A.